



# Pilot Points

Piloty z odsadzeniem

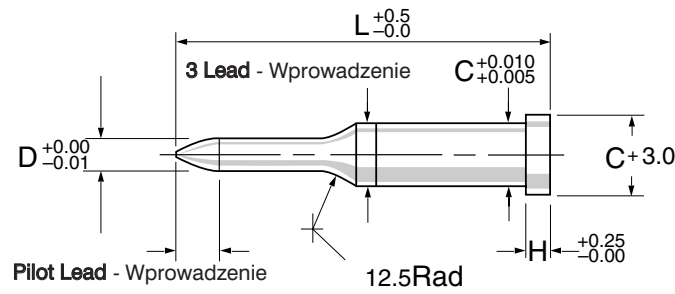


Overall length up to 125mm – Całkowita długość do 125mm  
 Any alternative dimensions to the above can be specified –  
 Dostępne są też inne wymiary niż określone powyżej


Type B




Type C



Type D



Type AL



Symbol	C	H	D
MP3	3	4.2*	2.3–2.95
MP4	4	4.2*	2.3–3.95
MP5	5	4.2*	2.3–4.95
MP6	6	5.0	2.3–5.95
MP7	7	5.0	3.2–6.95
MP8	8	5.0	3.2–7.95
MP10	10	5.0	3.2–9.95
MP12	12	5.0	5.3–11.95
MP13	13	5.0	6.3–12.95
MP14	14	5.0	6.3–13.95
MP16	16	5.0	9.5–15.95
MP18	18	5.0	9.5–17.95
MP19	19	6.4*	9.5–18.95
MP20	20	6.4*	12.0–19.95
MP22	22	6.4*	15.0–21.95
MP25	25	6.4*	18.0–24.95
MP28	28	6.4*	22.0–27.95
MP30	30	6.4*	25.0–29.95
MP32	32	6.4*	27.0–31.95
MP35	35	6.4*	30.0–34.95
MP40	40	6.4*	33.0–39.95
MP45	45	6.4*	38.0–44.95

D	Pilot Lead Wprowadzenie
2.3–6.0	4
6.01–10.0	6
10.01–13.0	8
13.01–18.0	10
18.01–25.0	13
25.01–45.0	16

Example order – Przykładowe zamówienie  
 12 off MP18C 12.0 90 lg

\*5mm Head thickness available – Główka o grubości 5mm na życzenie

Imperial sizes also available – Wszystkie wymiary dostępne także w wersji calowej