


Plunged Hole Punches

Głowa d'Y Xc k n m U b] U' c k c f C k Xc [k] b r c k U b] U

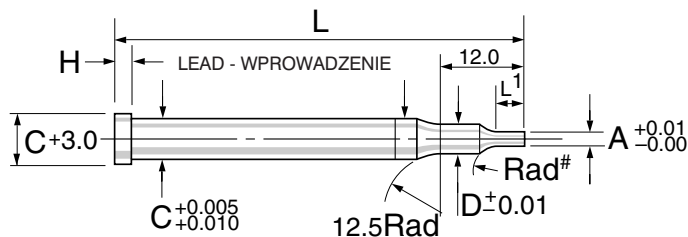

#Specify if Angle required instead of Radius

– #Proszę określić czy zamiast zaokrąglenia wymagane jest odsadzenie stożkowe

Any alternative dimensions to the above can be specified – Inne wymiary na życzenie

Symbol	ScrewThread Gwint	A	C	D	L ¹	H	L
PH2	M2	1.1	3.0	1.65	1.5	4.2*	S o
PH2.5	M2.5	1.5	3.0	2.1	2.0	4.2*	P k
PH3	M3	1.8	3.0	2.55	2.5	4.2*	E r
PH4	M4	2.3	4.0	3.35	3.0	4.2*	C e
PH5	M5	3.0	5.0	4.25	3.0	4.2*	I l
PH6	M6	3.5	6.0	5.1	3.0	5.0	F i
PH8	M8	4.9	8.0	6.85	4.0	5.0	Y ć

Example order – Przykładowe zamówienie

6 off PH4 75 lg

*5mm head thickness available – Główna o grubości *5mm na życzenie